


92798 Cape Arago Hwy.
Coos Bay, OR 97420
Phone (541) 888-3517
Fax (541) 888-4846
www.kksound.com

Double Big Twin


Thank you for buying the K&K *Double Big Twin*!

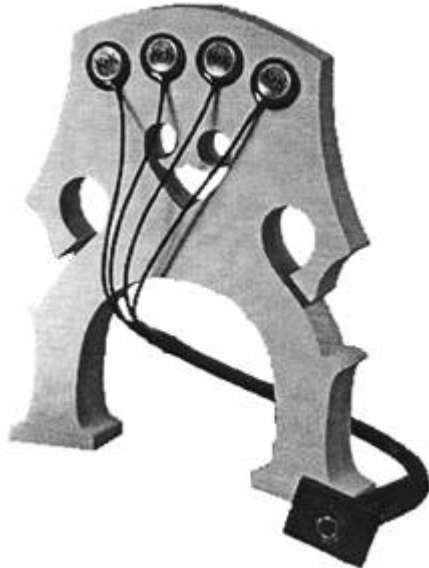


This is a very sophisticated four-head transducer system for the upright jazz bass. It is designed to transmit a harmonized jazz bass sound with a lot of very low and high frequencies. The high frequency response ensures a clean amplification of the finger pick sound. The low frequency transmission refers to a desired warm low end.

Double Big Twin is easily mounted and needs no modification on your instrument.

1. Prep the pickup discs with the supplied double-side adhesive and affix them to the bass bridge facing the string holder.



2. To balance the loudness of each single string, move single discs closer to or farther away from the string.
3. For maximum loudness, attach the transducers with super glue. Check for optimum string balance first by using the tape. It is nearly impossible to remove super glued pickups without damage.
4. Attach the jack between your A and D string with its holder device.
5. The cables from the four pickups to the jack must not touch the instrument. Contact will cause mechanical noise.

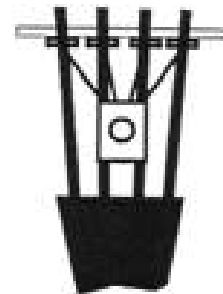

We recommend the K&K *Pure Preamp* with the *Double Big Twin*.

Technical Data:

Diameter of transducer heads: 3/4"

Height of transducer heads: 1/32"

Output impedance: high ohmic

Length of connection cable: 6"

Output: Mono 1/4" jack

Please use high impedance input at your amplifier for direct connection